


Papyrus Server/Fax

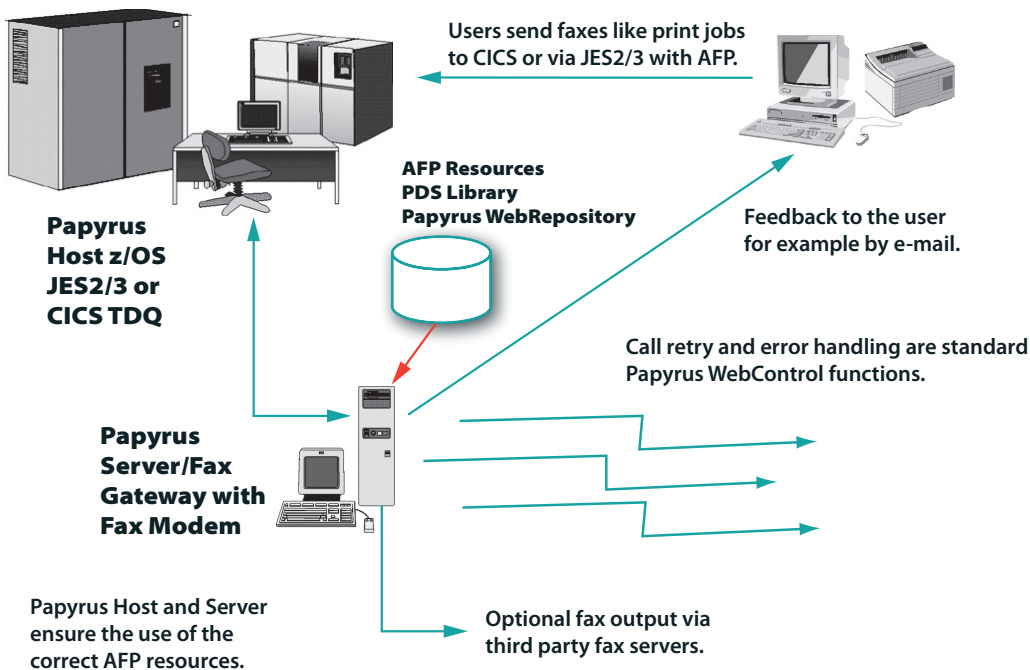


Product Description

Papyrus Server supports the processing of all AFPDS documents and line print applications using PAGEDEF/FORMDEF and OVERLAYS. Conversion to the standard high-resolution fax format is used to process the AFP output on any standard fax modem.

If required, output can be sent directly from JES spool through the **Papyrus Host QFSS** task to the **Papyrus Server** using the same FSS interface as PSF. This also enables automatic AFP resource management.

The sender's and receiver's names and phone numbers can be extracted from the list file, the AFPDS text in a document or from IBM ACIF TLE records. The output is then passed to the modem interface which also offers the user a log facility. Call retry and error handling are standard **Papyrus WebControl** functions.



ISIS PYPYRUS™

Automatic faxing of AFP applications from JES2/3.

Contact

Europe

P: +43-2236-27551
F: +43-2236-21081

America

P: 817-416-2345
F: 817-416-1223

Asia Pacific

P: +65-6339-8719
F: +65-6336-6933

E-mail

info@isis-papyrus.com

Internet

www.isis-papyrus.com

© 2016, ISIS Papyrus, replaces all previous documentation.

January 1st, 2016

Functions

- *Papyrus Server/Fax* fully supports AFPDS documents (LIST3820) generated by DCF/Script, ACIF, *Papyrus DocEXEC* or any other product.
- Print applications using PAGEDEF/FORMDEF and OVERLAY with or without *Mixed Mode* imbedded IMM, IDM and IPO AFPDS structured fields are also fully supported.
- AFP applications are converted to compressed images in 200 dpi and then sent to the fax server modem.

Server Interface

Using the standard server interface, the line data or AFPDS files are sent by a user utility to the *Papyrus Server/Fax*. The user has to take care of the resources which have to be already available on the server for conversion or can be accessed via IP from *Papyrus WebRepository*.

z/OS JES 2/3 Interface

To connect the server to the mainframe, *Papyrus Host FSS* is an z/OS started task which utilizes the same FSS interface to the JES spool as IBM PSF. The spool files, parameter and all AFP resources are then sent to the server automatically. This provides the fax solution with an AFP printer.

Optional CICS/MQ Series Interface

- *Papyrus Host* also offers a CICS Transient Data Queue or MQ Series interface which can send print files from a CICS transaction or MQ request directly.
- *Papyrus Server/Fax* is connected to the host using SNA LU6.2 or TCP/IP.

WebControl Interface

The *Papyrus WebControl* is an optional graphical user interface which provides print, job, spool and queue management through any browser or *Papyrus Desktop*. This includes user authorization, depending on role and privilege, for server access.

ISDN Fax solution on Windows

Using an ISDN fax card with 4 controllers having 2 channels each allows to send up to 8 faxes in parallel. The ISIS Papyrus FAX / G3 Module was enhanced to create one SFF (structured file format) per document which is then distributed via a queue to one of the channels of the ISDN fax card. The solution requires Papyrus Objects.

Configuration

Processing speed is dependent on the application complexity. Up to 100 pages per minute can be achieved with a faster processor to support multiple outbound lines.

Recommended configuration

- Intel Pentium IV or higher
- 512MB RAM (1GB recommended)
- 1 GB disk
- Ethernet or T/R card
- Windows 2K/XP/2K3/VISTA/2K8/7
- SNA Gateway for LU6.2 or TCP/IP
- Outbound PU2.1 (3174, 3745)

Sender/Receiver Control

Sender and receiver information can be extracted from the list file via AFPDS text records or using the AFPDS TLE records inserted by IBM ACIF or other products like DCF/Script. Optionally, job control parameters can be used.

AFP Resources

To properly and safely print or process AFP output, it is required to use all the original AFP resources such as forms, logos and fonts.

According to IBM terms and conditions, IBM's licensed fonts may be transferred with the output files for the purposes of back up and print services only. Papyrus simply acts as a print server for fax.

ISIS provides utility programs to properly collect and generate the resource tapes on various platforms.

Order Information

Papyrus Server/Fax

Training

ISIS offers in-house workshops and standard courses for user training.

Maintenance

The Terms and Conditions for ISIS Software Products apply. Free service period is 6 months after installation. A maintenance agreement is offered optionally for updates and hotline.